


ETERNITY TIMELESS CARRARA BELLA (H) W/ DOVE GRAY (C) *Stone, Marble, Glass*

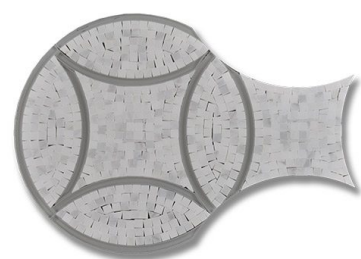

PART NUMBER	PROFILE	AVAILABILITY
MB1604-TIMEH1	MOSAIC	SPECIAL ORDER
GROUT JOINT	DIMENSIONS	THICKNESS
1/16"	11.41" x 11.41" = .904 sqft	3/8"

NOTES

Water jet mosaics are delicate in nature, and thus, fractures in the tesserae are expected and considered natural. grout colors may be chosen to match the color of the stone and will reduce the appearance of the cracks.

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH
Yes	No	Commercial	No	YES - when properly sealed	YES - when properly sealed	No	YES - Heat not to exceed 1472°F
FIREPLACE SURROUND		INTERIOR	SHOWER				
YES - Heat not to exceed 1472°F		Yes	No				

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION
DCOF - ANSI A.137.1	Due to the natural characteristics and variation in natural stone, slip resistance will vary. Such factors are dependent on lots, finish and the topical sealant applied. There is currently no standard industry test with the ability to measure the exact slip resistance.
	In order to reduce the slipperiness of stone surfaces, AKDO suggests selecting a Non-Polished finish such as Honed, Sandblasted, or Textured stone, or choosing a mosaic, as the grout joints in the stone result in an increase of friction.