


## DIAMETRIC 24" X 24" WHITE (M) *Porcelain*

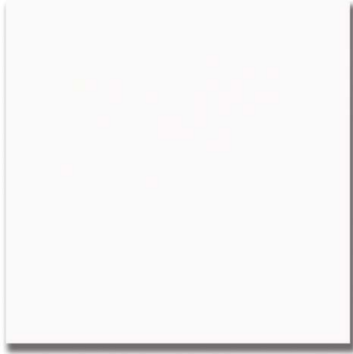

PART NUMBER  
**PO2349-2424M0**

GROUT JOINT  
**1/16"**

**NOTES**

Available nationwide.  
Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE  
**TILE**

DIMENSIONS  
**23.64" x 23.64" = 3.875 sqft**

AVAILABILITY  
**FACTORY OUTLET**

THICKNESS  
**3/8"**

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Standard Commercial	Yes	Yes	Yes	Yes	Yes	Yes

### INTERIOR

Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Breaking Strength - ISO 10545-4	2720N	Frost Resistance - ISO 10545-9	Pass
Bending Resistance - ISO 10545-4	R <sup>3</sup> 35 N/mm <sup>2</sup>	Regularity of Length & Width - ISO 10545-2	600±0.00mm +/- 0.6mm 298±0.00mm +/- 0.6mm
Regularity of Rectangularity - ISO 10545-2	Ö +/- 0.4mm	Regularity of Straightness of Sides - ISO 10545-2	Ö +/- 0.5mm
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Surface Flatness - ISO 10545-2	300mm (0.6±0.7mm) 600mm (0.7±0.9mm)	Water Absorption - ISO 10545-3	0.04%

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION
DCOF - ANSI A.137.1	0.51