

AKDO®

ALPINE

Organic. Classic. Warm
A timeless look meets timeless durability.

Far Beyond the Surface

Grey



Alpine 8" x 48" Grey (M)

PO2717-0848M0





Oak



Alpine 8" x 48" Oak (M)

PO2720-0848M0



Ceramic


Alpine Wall 12" x 36" Oak (M)

CR2720-1236WA

ALPINE

porcelain

Redwood

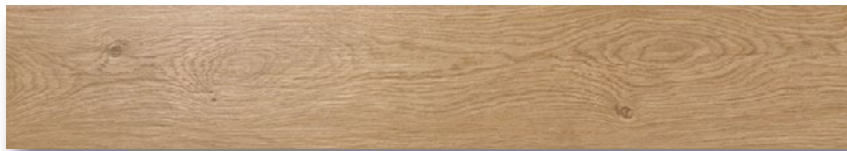


Alpine 8" x 48" Redwood (M)

PO2718-0848M0





Walnut

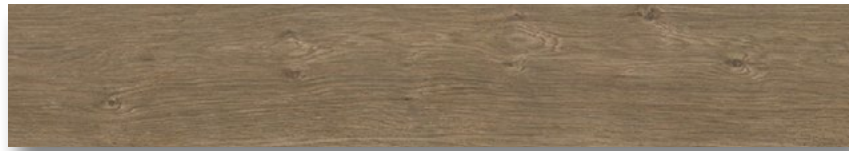

Alpine 8" x 48" Walnut (M)

PO2719-0848M0

CONVERSION CHART

| PROFILE | SIZE |
|-----------|-----------------------------|
| 8" x 48" | 7.87" x 47.24" = 2.58 sqft |
| 12" x 36" | 11.81" x 35.43" = 2.91 sqft |

APPLICATIONS — ALPINE, PORCELAIN

| WALL | FLOOR | INTERIOR | EXTERIOR FREEZE/THAW | STEAM SHOWER | WET AREA | POOL |
|------|-------|----------|-------------------------|--------------|----------|------|
| Yes | Yes | Yes | No | Yes | Yes | No |

| BACKSPLASH | FIREPLACE SURROUND | TRAFFIC |
|------------|-----------------------|---------------------|
| Yes | Yes | Heavy Commercial |

TECHNICAL DATA

| FEATURES | STANDARD TEST | SPECIFICATION |
|--|---------------------------------|---------------|
| Bending Resistance | ISO 10545-4 | MIN 35 |
| Booted Ramp Test | DIN 51130 (Alpine Line) | R11 |
| Breaking Strength | ISO 10545-4 | MIN 1300 |
| Frost Resistance | ISO 10545-12 | Compliant |
| Pendulum Friction Test | UNE-ENV 12633 UNE 41901:2017 EX | Class C1 |
| Reaction to Fire | | A1 - A1fl |
| Regularity of Length & Width | ISO 10545-2 | Compliant |
| Regularity of Rectangularity | ISO 10545-2 | Compliant |
| Regularity of Straightness of Sides | ISO 10545-2 | Compliant |
| Regularity of Surface Flatness | ISO 10545-2 | Compliant |
| Regularity of Thickness | ISO 10545-2 | Compliant |
| Resistance to High Concentrations of Acids and Alkalis | ISO 10545-13 | MIN HB |
| Resistance to Household Chemicals | ISO 10545-13 | MIN B |
| Resistance to Low Concentrations of Acids and Alkalis | ISO 10545-13 | MIN LB |
| Resistance to Swimming Pool Salts | ISO 10545-13 | MIN B |
| Stain Resistance | ISO 10545-14 | Complies |
| Water Absorption | ISO 10545-3 | ≤0.5% |
| DCOF | ANSI A326.3:2017 | > 0.42 wet |

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot. For detailed installation guidelines, visit akdo.com.

APPLICATIONS — ALPINE WALL, CERAMIC

| WALL | FLOOR | INTERIOR | EXTERIOR FREEZE/THAW | STEAM SHOWER | WET AREA | POOL |
|------|-------|----------|-------------------------|--------------|----------|------|
| Yes | No | Yes | No | Yes | Yes | No |

| BACKSPLASH | FIREPLACE SURROUND |
|------------|-----------------------|
| Yes | Yes |

TECHNICAL DATA

| FEATURES | STANDARD TEST | SPECIFICATION |
|--|--------------------------|---------------|
| Resistance to Cracking | UNE-EN ISO 10545-11 | Compliant |
| Resistance to Thermal Shock | SHOCK UNE-EN ISO 10545-9 | Compliant |
| Frost Resistance | UNE-EN ISO 10545-12 | Compliant |
| Resistance to High Concentrations of Acids and Alkalis | ISO 10545-13 | MIN HB |
| Resistance to Household Chemicals | ISO 10545-13 | MIN B |
| Resistance to Low Concentrations of Acids and Alkalis | ISO 10545-13 | MIN LB |
| Resistance to Swimming Pool Salts | ISO 10545-13 | MIN B |
| Reaction to Fire | | A1 - A1fl |
| DCOF | ANSI A326.3:2017 | > 0.42 wet |

Due to the inherent characteristics of ceramic, there may be variations in color, movement and texture from lot to lot.
For detailed installation guidelines, visit akdo.com.

AKDO

1435 State Street
Bridgeport, CT 06605
1.800.811.2536
203.336.5199 (o)
203.336.0603 (f)

AKDO NYC

22 West 21st Street
New York, NY 10010
1.800.811.2536
212.485.0448 (o)
212.485.0449 (f)

AKDO Pacific

3445 Arden Road
Hayward, CA 94545
1.888.909.2536
510.785.2536 (o)
510.785.0895 (f)

akdo.com

