

AKDO®

# PRIMAL

---

*Hardwearing. Rigid. Unyielding.*


Timeless tradition meets modern strength.




---

Far Beyond the Surface

Coal



Primal 2" x 2" Coal (Textured)  
PO2852-M002T0

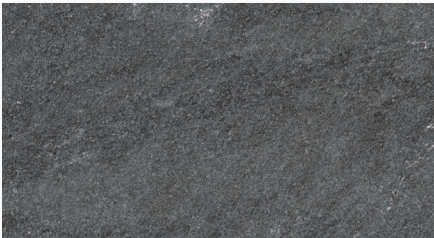

Primal 12" x 24" Coal (Textured)  
PO2852-1224T0



Primal 24" x 48" Coal (Textured)  
PO2852-2448T0

Sand



Primal 2" x 2" Sand (Textured)  
PO2853-M002T0




Primal 12" x 24" Sand (Textured)  
PO2853-1224T0



Primal 24" x 48" Sand (Textured)  
PO2853-2448T0



Silver



Primal 2" x 2" Silver (Textured)  
PO2854-M002T0



Primal 12" x 24" Silver (Textured)  
PO2854-1224T0



Primal 24" x 48" Silver (Textured)  
PO2854-2448T0

Warm



Primal 2" x 2" Warm (Textured)  
PO2855-M002T0



Primal 12" x 24" Warm (Textured)  
PO2855-1224T0



Primal 24" x 48" Warm (Textured)  
PO2855-2448T0

# PRIMAL

---

## DIMENSIONS

PROFILE	SIZE
2" x 2"	11 3/4" x 11 3/4" = 0.97 sqft (+/-)
12" x 24"	11 3/4" x 23 5/8" = 1.94 sqft (+/-)
24" x 48"	23 5/8" x 47 1/4" = 7.75 sqft (+/-)

## APPLICATIONS

INTERIOR	EXTERIOR	TRAFFIC	SHOWER	BACKSPLASH	FIREPLACE SURROUND
Wall and Floor	Yes	Commercial	Wall and Floor, Including Steam	Yes	Yes

### POOL

Yes

## TECHNICAL DATA

FEATURES	STANDARD TEST	SPECIFICATION
Assessment of Slip Resistance	DIN EN 16165:2023 Annex B	R11
Bending Resistance	ISO 10545-4	Compliant
Coefficient of Thermal Linear Expansion	ISO 10545-8	$\leq 7 \cdot 10^{-6} \cdot C^{-1}$
Coefficient of Restitution	ISO 10545-5	Compliant
Deep Abrasion Resistance	ISO 10545-6	Compliant
Frost Resistance	ISO 10545-12	Compliant
Lead and Cadmium Discharge	ISO 10545-15	Than Instrument Limit
Measurement of Dynamic Coefficient of Friction	DCOF ANSI A326.3	Wet DCOF $\geq 0,42$
Moisture Expansion	ISO 10545-10	$\leq 0.02\%$ (0.2mm/m)
Resistance to Fire	ISO 13501-1	A1 <sub>fl</sub>
Resistance to Frost	ISO 10545-12	Compliant
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13	HA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13	LA
Resistance to Household Chemicals / Swimming Pool Salts	ISO 10545-13	A
Stain Resistance	ISO 10545-14	Class 5
Thermal Shock Resistance	ISO 10545-9	Compliant
Water Absorption	ISO 10545-3	$\leq 0.2\%$

Due to the inherent characteristics of porcelain, there may be variations in color, movement, and texture from lot to lot. For detailed installation guidelines, visit [akdo.com](http://akdo.com).

## AKDO

1435 State Street  
Bridgeport, CT 06605  
1.800.811.2536  
203.336.5199 (o)  
203.404.5000 (f)

## AKDO NYC

22 West 21st Street  
New York, NY 10010  
1.800.811.2536  
212.485.0448 (o)  
646.273.3903 (f)

[akdo.com](http://akdo.com)

