


PASSAGE REVIVAL WHITE (M) *Porcelain*

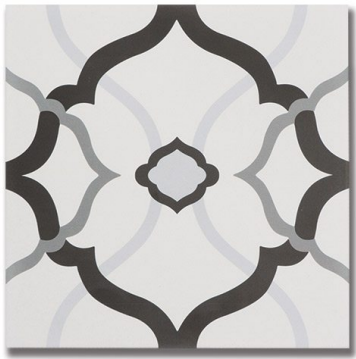

PART NUMBER	PROFILE	AVAILABILITY
PO2290-REV100	TILE	AVAILABLE ON REQUEST
GROUT JOINT	DIMENSIONS	THICKNESS
1/8"	7.28" x 7.28" = .368 sqft	3/8"
ORIGIN		
Spain		

NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Heavy Commercial	Yes	Yes	Yes	Yes	Yes	Yes
INTERIOR								
Yes								

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Pass
Frost Resistance - ISO 10545-12	Pass	Regularity of Length & Width - ISO 10545-2	186 +/- 0.6 x 186 +/- 0.6 mm x 10 mm
Resistance to Household Chemicals - ISO 10545-13	GA	Resistance to Swimming Pool Salts - ISO 10545-13	GA
Water Absorption - ISO 10545-3	Eb ² 0.5%	TECHNICAL DATA	
FEATURES & STANDARD	SPECIFICATION		
DCOF - ANSI A.137.1	> 0.42		