


## SIO SOLID GRAY HEX (M) *Porcelain*

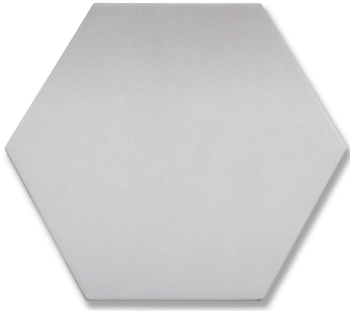

PART NUMBER  
**PO2542-HEXAM0**

PROFILE  
**TILE**

AVAILABILITY  
**REGULAR STOCK**

GROUT JOINT  
**1/16"**

DIMENSIONS  
**7.87" x 9.06" = .37 sqft**

THICKNESS  
**3/8"**

ORIGIN  
**Spain**

### NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Residential and Light Commercial	Yes	Yes	Yes	Yes	Yes	Yes

### INTERIOR

Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Chemical Resistance - ISO 10545-13	GLA	Crazing Resistance - ISO 10545-11	Resistant
Frost Resistance - ISO 10545-12	Resistant	Resistance to Household Chemicals - ISO 10545-13	GA
Resistance to Swimming Pool Salts - ISO 10545-13	GA	Water Absorption - ISO 10545-3	Eb <sup>2</sup> 0.5%
Pei Rating	Group 3		

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION
DCOF - ANSI A.137.1	> 0.42

### LEED

EQ Low Emitting Materials      MR Material Ingredient Optimization

No VOCs emission  
**akdo.com**

Compliant with the Restrictions of Reach and are free of the SVHC listed on the candidate list.

COMMERCIAL · HOSPITALITY · RESIDENTIAL