


## CONCRETE JUNGLE 24" X 24" X 3/4" STORE PAVER (T) *Porcelain*

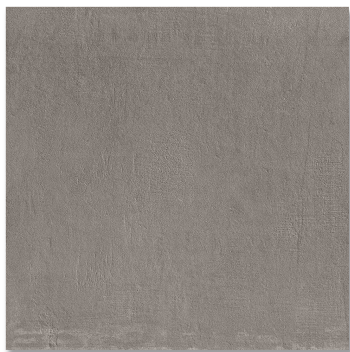

PART NUMBER

PO2521-2424GR

DIMENSIONS

23.64" x 23.64" = 3.875 sqft

NOTES

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

PROFILE

PAVERS

THICKNESS

3/4"

AVAILABILITY

AVAILABLE ON REQUEST

ORIGIN

Italy

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Standard Commercial	Yes	Yes	Yes	Yes	Yes	Yes

### INTERIOR

Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	145mm <sup>3</sup>	Breaking Strength - ISO 10545-4	13600N
Chemical Resistance - ISO 10545-13	LA, HA Resistant	Shade Variation - ANSI A 137.1	V3
Frost Resistance - ISO 10545-12	Resistant	Fire Reaction - EN 9239-1	Class A1fl (floor)
Fire Reaction - EN 13823	Class A1 (wall)	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Regularity of Thickness - ISO 10545-2	Compliant	Resistance To Staining - ISO 10545-14	5 Resistant
Slip Resistance - ANSI A326.3	DCOF <sub>W</sub> ≥ 0.42	Slip Resistance (Ramp Test) - DIN 51130	R11
Water Absorption - ISO 10545-3	0,05 %	Thermal Conductivity - EN 12524	□ = 1,3 W/m °K
Modulus of Rupture - ISO 10545-4	50 N/mm <sup>2</sup>		

### LEED

MR	MR	EQ	ID
Recycled Content	Environmental Product Declaration	Low Emitting Materials	Innovation & Design
40% Pre-Consumer Recycled Material	Available industry-wide Environmental Product Declaration (EPD)	No VOCs Emission	Certificate Greenguard GOLD