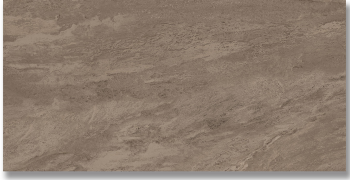


SKYSCAPE 20" X 40" X 3/4" TWILIGHT PAVER (T) *Porcelain*

	PART NUMBER	PROFILE	AVAILABILITY
	PO2437-2040T0	PAVERS	SPECIAL ORDER
	THICKNESS		
	3/4"		
	NOTES		
	Available nationwide.		
	Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.		

APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH	FIREPLACE SURROUND
Yes	Yes	Commercial	Yes	Yes	Yes	Yes	Yes	Yes
INTERIOR								
Yes								

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION	FEATURES & STANDARD	SPECIFICATION
Abrasion Resistance - ISO 10545-6	Compliant	Barefoot Ramp Test - DIN 51097	A+B+C
Breaking Strength - ISO 10545-4	$S > 10000 \text{ N} \text{ } \overline{\text{D}} \text{ } R > 45 \text{ N/mm}^2$	Chemical Resistance - ISO 10545-13	Compliant
Coefficient of Thermal Linear Expansion - ISO 10545-8	Compliant	Coefficient of Friction - B.C.R.A. Rep. CEC/81	>0.4
Frost Resistance - ISO 10545-12	Compliant	Regularity of Length & Width - ISO 10545-2	Compliant
Regularity of Rectangularity - ISO 10545-2	Compliant	Regularity of Straightness of Sides - ISO 10545-2	Compliant
Surface Quality - ISO 10545-2	Compliant	Water Absorption - ISO 10545-3	$\leq 0.1\%$

TECHNICAL DATA

FEATURES & STANDARD	SPECIFICATION
DCOF - ANSI A.137.1	> 0.42