


## SKYSCAPE 20" X 40" X 3/4" TWILIGHT PAVER (T) *Porcelain*

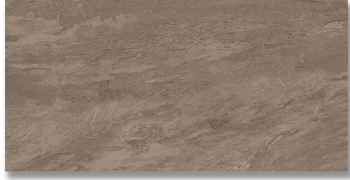

PART NUMBER  
PO2437-2040T0

PROFILE  
PAVERS

AVAILABILITY  
AVAILABLE ON REQUEST

THICKNESS  
3/4"

NOTES  
Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

### APPLICATION AREA

| WALL | FLOOR | TRAFFIC             | EXTERIOR | STEAM<br>SHOWER | WET<br>AREA | POOL | BACKSPLASH | FIREPLACE<br>SURROUND |
|------|-------|---------------------|----------|-----------------|-------------|------|------------|-----------------------|
| Yes  | Yes   | Heavy<br>Commercial | Yes      | Yes             | Yes         | Yes  | Yes        | Yes                   |

### INTERIOR

Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

| FEATURES & STANDARD                                   | SPECIFICATION   | FEATURES & STANDARD                               | SPECIFICATION |
|---|---|---|---------------|
| Abrasion Resistance - ISO 10545-6                     | Compliant   | Barefoot Ramp Test - DIN 51097                    | A+B+C         |
| Breaking Strength - ISO 10545-4                       | $S > 10000 \text{ N} \text{ \&R} > 45 \text{ N/mm}^2$ | Chemical Resistance - ISO 10545-13                | Compliant     |
| Coefficient of Thermal Linear Expansion - ISO 10545-8 | Compliant   | Coefficient of Friction - B.C.R.A. Rep. CEC/81    | >0.4          |
| Frost Resistance - ISO 10545-12                       | Compliant   | Regularity of length & Width - ISO 10545-2        | Compliant     |
| Regularity of Rectangularity - ISO 10545-2            | Compliant   | Regularity of Straightness of Sides - ISO 10545-2 | Compliant     |
| Surface Quality - ISO 10545-2                         | Compliant   | Water Absorption - ISO 10545-3                    | $\leq 0.1\%$  |

TECHNIC

### FEATURES & STANDARD

DCOF - ANSI A.137.1

### SPECIFICATION

> 0.42